



Only 2.5% of the Earth's water is non-salty

ELUTRON®

TANKS


The ELUTRON® Underground Tank Technology provides proven pollution protection for our earth's very fragile and limited underground drinking water sources.

Polyurethane Secondary Containment Structure. Polyurethane structure is seamless, durable and encapsulates the primary steel tank. The Polyurethane is Underwriters Laboratories Inc. (UL) performance tested and listed for exterior corrosion protection per UL Standard 1746. External Corrosion Protection Systems for Steel Underground Tanks.

Aluminum foil provides a minimum clearance, free flowing 360° interstice.

Inner primary steel tank per UL Standard 58, Steel Underground Tanks for Flammable and Combustible Liquids. Steel is the proven, ideal, cost effective material for long term structural security performance.

UL Standard 58 External Pressure Test
Tank submerged in 5 feet (1.53m) of water, no backfill for support, no buckling or deflection.

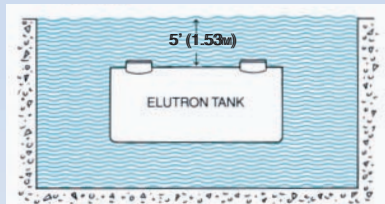

Steel monitor access tube is welded liquid tight into steel tank. In the event of a breach to the inner or outer wall, the intruding liquid flows into the monitor access tube. Any liquid in contact with the electronic sensor probe will trigger alarm.



Non-corroding collar (optional) provides solid attachments for piping containment sumps.

Less than 1% of the Earth's drinking water is available to humans



Proven installed performance worldwide. Over 35,000 Plasteel tanks have been installed since 1971.

Installation procedures are simple with choice of backfill materials. High water table procedures are not complex. Anti flotation anchoring assemblies are available for concrete ballast pads and deadmen.

ELUTRON® tanks have a limited 30 year warranty when storing flammable and combustible liquids.

Capacities available from 500-50,000 gallons (2000 L-200,000 L). Special diameters and lengths available. Multiple compartment tanks available.

*Customization Isn't An Added Service.
It's **THE HEART** of Our Business.*



LANNON TANK CORPORATION

Lannon Tank Company, LLC 20134 W Main Street Lannon, WI 53046
Phone: (262)251-7890 Fax: (262)251-0484 Web: www.lannontank.com

2541 State Street, Suite 205, Carlsbad, CA 92008
TEL: 1-760-729-1093 FAX: 1-760-729-1096
Web: <http://www.plasteel.com>
E-Mail: tanktech@plasteel.com

PLASTEEL
INTERNATIONAL INC.

